



Technical Bulletin: 26



Revision: 3

Razor International Pty Ltd, Campbellfield VIC
service@razorinternational.com

1300 555 865

4 Button Remote Pairing & De-Pairing (DELTA II)

Affected Product: D1.5 / DII controller and Controller Module(CII)

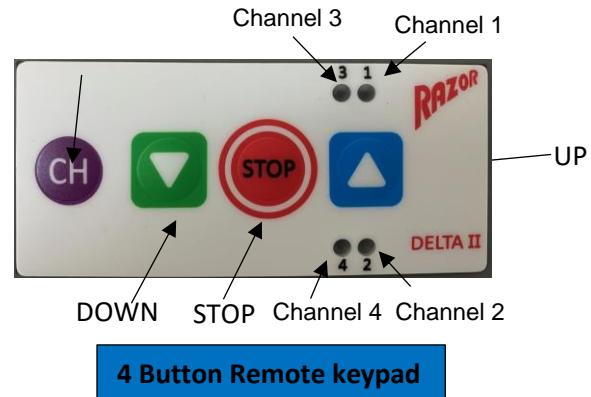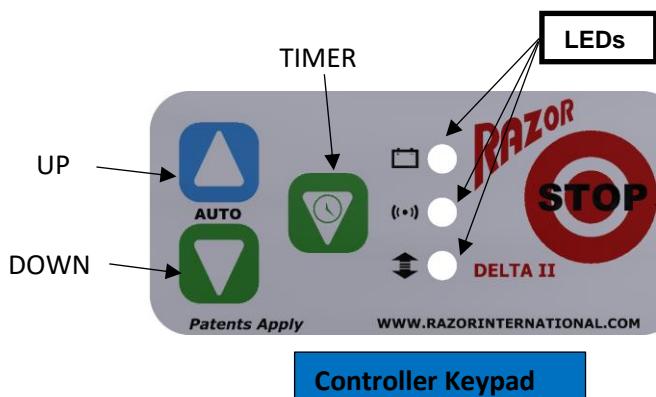

PAIRING PROCEDURE

CONTROLLER: Press and hold “STOP” button, then press and hold “TIMER” buttons for 3 seconds until double beep is heard. Green LED (the middle Led ) will flash twice per second.

(Note: Pairing mode on the controller will remain active for 40 seconds or until pairing with remote is made)

REMOTE: Press and hold “STOP” button, then press and hold “CH” button on the remote until a double beep is heard/green LED flashes and release button, a further long flash of green LED indicates pairing is complete, please note:

1. when pairing the led will glow green, if successfully it will flash Green rapidly 5 times, otherwise it wont flash if the process times out.
2. Pairing mode on the remote will remain active for 8 seconds or until pairing is made with remote)

(Note: Pairing mode on the remote will remain active for 8 seconds or until pairing is made with remote)

TO CHANGE CHANNEL

Procedure: Press and hold “STOP” button, then momentarily press “CH” button on the remote (Default Channel is “1”) until the Channel you required is activated, indicating by the corresponding number Led glows every 2 seconds(ie: Channel 2 activated---- Number “2” glows)

DE-PAIRING PROCEDURE

REMOTE: Press and hold “STOP” button, then press and hold “CH” button on the remote, initially a double beep is heard/green LED will flash and keep holding “Stop” & “Channel” button until a three long beep is heard. Then the remote now is de-paired from the controller.

If the above pairing and de-pairing are not successful, repeat the procedures.